

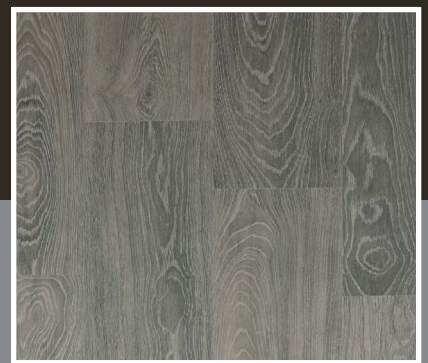


Inspiring Great Spaces™

Armstrong[®]
WOODEN FLOORING

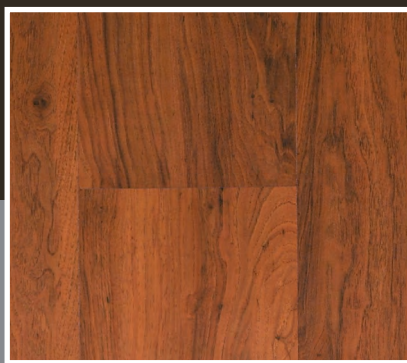

Abode
LAMINATE FLOORING

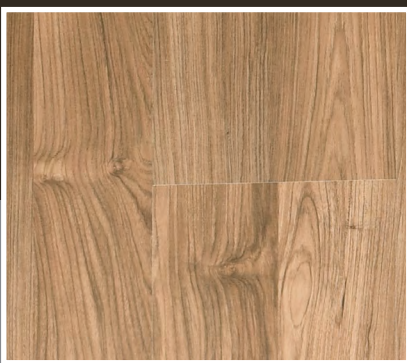

AC3
ABRASION
CLASSIFICATION

Thickness
millimeter **8**

UNICLIC[®]

VisionGuard



MasterWorks
TECHNOLOGY

HydroCore



AI709 OAK NATURAL

1286 x 194 x 7 mm _2.5*m²



A1710 SMOKED OAK

1286 x 194 x 7 mm 2.5*m²



AI301 ABUBURN CHERRY

1286 x 194 x 7 mm _2.5*m²



AI707 ALMEDA OAK

1286 x 194 x 7 mm 2.5*m²



AI708 EUROPEAN WALNUT

1286 x 194 x 7 mm 2.5*m²




A1706 GLEN WOOD OAK

1286 x 194 x 7 mm 2.5*m²

Abode

what is wooden laminate?



Laminate flooring has a layered construction:

- A Wear layer:** This easy-to-clean surface contains aluminium oxide which protects the floor from stains, fading and wear. Look for an abrasion classification (AC) rating of at least 3 for adequate residential use protection.
- B Image design layer:** A photographic image of wood, stone, or virtually anything you can imagine.
- C Inner core layer:** The core provides the floor's structural strength and stability. It is made from high-density fiberboard (HDF). The core is often impregnated with a plastic resin called melamine to increase the floor's strength, stability and resistance to moisture. Products that have high levels of melamine do not require acclimation before installation.
- D Backing layer:** Found beneath the inner core, the backing is made with resin saturated paper. It creates a moisture barrier that protects the floor from warping.

why Armstrong® wooden laminate?

VisionGuard™

AC3 wear surface available that's easy to clean and protects the floor from stains, fading or wear. Best of all it cleans up quickly with a vacuum or a damp mop and keeps the floor looking like new, year after year. Our Vision Guard™ wear layer (AC3) can withstand over 2600 cycles.



Award-winning printing technology that creates the most realistic, clear and vibrant floor designs. Print inks used in design layer contains UV inhibitors which provide sunlight protection. Our remarkable embossing technology infuses the natural look with depth and texture.

HydraCore™

Superior performance structure that resists surface spills or moisture from the subfloor. The density of the HDF HydraCore™ is ≥ 900 kg/m³ with a swelling rate of 12%.



This technology has been a revolution in the flooring world, because for the first time in flooring history (1996) a click system was milled directly in the core material of the flooring board. With this unique locking system, Armstrong's Abode provides you

- The pretension force compensates machine tolerances and avoids gaps between the panels, so that dust, dirt and moisture cannot enter in between two panels.
- The anti-creaking noise feature avoids creaking noises one can hear when walking on a floor.
- With this click system one can install panels in two different ways: angle and snap.

Go ahead, Look closer, Beauty like this demands a second glance. And Armstrong wooden laminate flooring maintains the illusion, even up close.

It's all there: the subtle color variations, the distinctive grain, the authentic texture. We have captured the dramatic beauty and design sophistication of the finest natural hardwood. All that's missing is the premium price tag.

The beauty of an Armstrong wooden laminate floor is no fleeting mirage. It's as durable as it is captivating, standing up to the punishment of the children, pets and everyday life with the promise of the industry's best warranty.

Create your own illusion with Armstrong wooden laminate flooring.

PRODUCT DESCRIPTION

Nominal Size (L x W xT)	: 1286 x 194 x 7mm
Package	: 10pcs/carton
Classification	: Class 23/Class 31
Surface Finish	: Natural embossing/ Grain embossing
Core Material	: High Density Fibre (HDF)
Installation System	: Floating system
Locking type	: Unilin click system
Edges/Ends	: Square

TEST STANDARD : GB/T 18102-2007, EN 13329-2006

Type	Test Method	Requirement	Typical Value
Abrasion Resistance	EN13329	≥ 2000	2600
Impact Resistance	EN13329	$\geq IC1$	IC1
Thickness Swelling	EN13329	$< 18\%$	12%
Effect of Furniture Leg	EN 424	No damage with type 0 indicator	No damage with type 0 indicator
Effect of Castor Chair	EN 425	No damage or visible changes in appearance	No damage or visible changes in appearance at 25,000rev.
Static Indention	EN 433	No visible change	No visible change
Resistance to stain	EN 438.2.18	Group 1&2:5	5
		Group 3:4	4
Resistance to cigarette Burn	EN 438.2.15	\geq Rating 4	5
Formaldehyde Release	EN 717	E1: < 1.5 ppm	0.6
Determination of Surface Soundness	EN13329	$\geq 1.0N/mm^2$	1.3
Dimensional Variations After Change in Humidity	EN13329	≤ 0.9 mm	0.4
Squareness of Element	EN13329	q max ≤ 0.2 mm	< 0.2
Height Difference between Elements (Hmax)	EN13329	h average ≤ 0.10 mm	≤ 0.10
		h max-h min ≤ 0.15 mm	≤ 0.15

ACCESSORIES

SKIRTING



Gives a classic finish to your wooden laminate floor, used where wall and flooring meet.

END EDGE



Finishes the space where wooden laminate flooring ends (such as sliding glass doors, along wall base, door, door thresholds and carpets).

T MOULDING




Fills the gap at doorways, and finishes space between the two areas of wooden laminate flooring.

REDUCER



Provides a smooth transition from your wooden laminate floor to another type of flooring of lower height. Also, finishes the space where laminate flooring ends against a vertical surface.

₹ ————— Price Guide ————— ₹₹₹

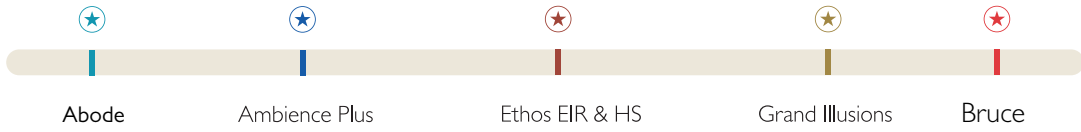

Note: for technical response the colours printed here may differ from actual floor colours. we recommend visiting a dealer to view a sample prior to purchase.



151A, Sowdambigai Nagar, Sivanandhapuram, Coimbatore, Tamil Nadu 641035

Phone : 0422 2666768 | Mobile: +91 98432 07879 | Email: sales@laybrown.com | Website: www.laybrown.com



www.armstrong.co.in