Inspiring Great Spaces™





AMBIENCE PLUS wooden laminate floor



















STYLISH. DURABLE. AFORDABLE

Richly textured and deeply grained, these planks range from contemporary colors to rustic shades of hardwood floors. Micro bevel edges are provided in some of the shades to accentuate each plank. Durable commercial AC4 wear layer resists stains, fading, scuffs and scratches and is guaranteed for 15 years for residential applications.


















































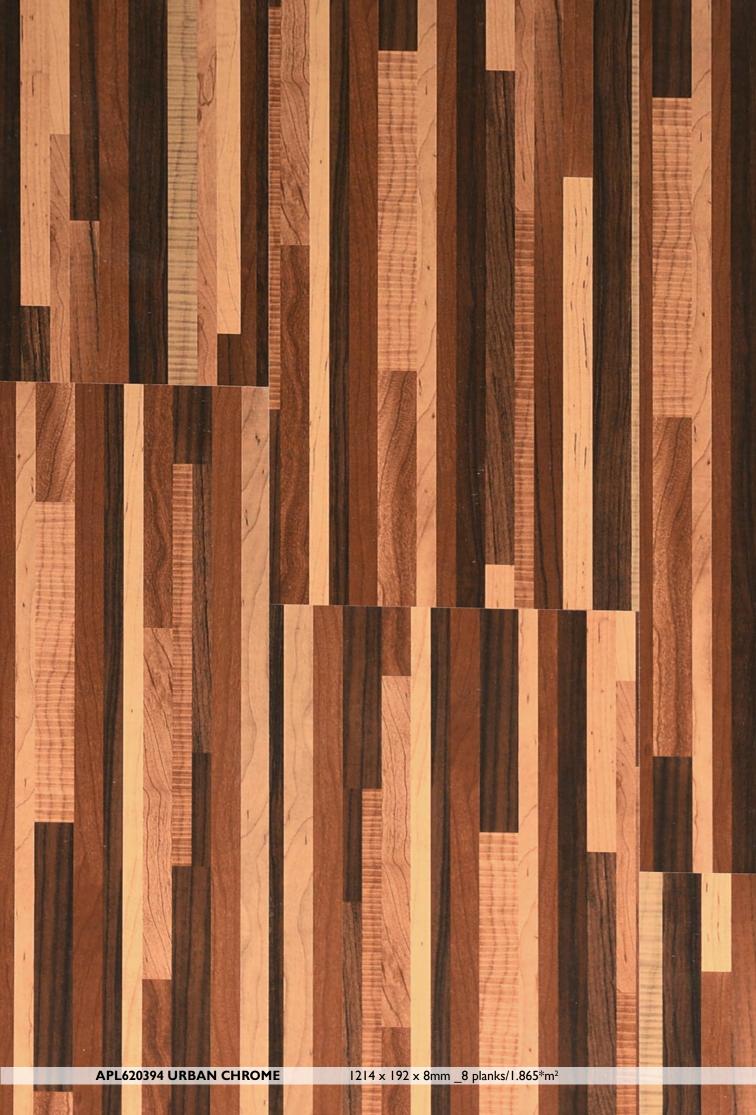



*

FEATURES

- Realistic Embossing
- Uniclic® locking Technology, results in fast and easy installation
- Hi-Denition Print Technology the most realistic looking laminate in the market.
- Vibrant color, intense depth.
- Bevelled edges to accentuate each plank.

WARRANTY: 15 years* limited warranty from the most trusted name in the industry.

ACCESSORIES

Enhance the beauty of your floor by using 100% matching Armstrong™ trim and mouldings.





SKIRTING

Gives a classic finish to your laminate floor, used where wall and flooring meet.





END EDGE

Provides a smooth transition from your laminate floor to another type of flooring of a lower height.





R-MOULDING

Finishes the sapce where wooden laminate flooring ends (such as doors, door threeshold, carpets etc.).





T-MOULDING

Fills the gap at doorways and finishes spaces between the two areas of laminate flooring.





SCOTIA

Gives a classic finish to your laminate floor-used where wall and flooring meet. Available in MDF finish.





STAIR NOSE

Provides a smooth transition to your staircase corners, where two wooden laminate planks matches.

EASE OF INSTALLATION

Armstrong's Ambience Premium and Ambience Plus provides you

- · Quicker, less expensive installation since no glue is required
- No need to remove old flooring materials Armstrong laminate installs over most existing floors
- Easy maintenance stains and spills wipe right up

CARF

The secret of Ambience laminate floors' enduring beauty and strength is the touch of care.

- Place a natural or colorfast mat at the entrance to collect tracked-in dirt and absorb excess moisture.
- Use Armstrong Felt Floor Protectors on chairs and other furniture. As a general rule of thumb, the heavier the item, the wider the floor protector should be.
- Use Armstrong Hardwood & Laminate Floor Cleaner to keep your floor looking at its best.
- For routine care, vacuum or sweep with a dust mop or damp cloth.
- For spills, just wipe it up with a cloth or sponge before using Armstrong Hardwood & Laminate Floor Cleaner.
- Do not use soap-based cleaners, abrasive cleaners, wax or polish, steel wool, scouring powder, which can scratch your floor.
- In sandy or beach areas, regularly vacuum or sweep its surface.

ARMSTRONG HARDWOOD & LAMINATE FLOOR CLEANER



Specially Formulated for Armstrong laminate floor.

Ready-to-use formula.

Requires no rising.

Simply spray and wipe or mop.

Technical Sheet

HydraCore: High density fiber board for superior performance at 948.3Kg/m³ with a swelling rate of 8.22%. Nearest competitor has density of 8503Kg/m³ with a swelling rate of 12%.

Vision Guard or Wear layer: This is AC4 range and smoothly attends more than 4000 cycles.

Locking: Newly introduced UNICLIC locking system, presently rated best in the industry. With a strength boasted to be 1000 Pounds per Linear feet, it's considered to be the most superior locking strength available in the industry.

Safety Test

	TEST		
ТҮРЕ	METHOD	REQUIREMENT	TYPICAL VALUE
Abrasion Resistance	EN13329	4000	Passed
Impact Resistance	EN13329	≥IC1	IC2
Thickness Swelling	EN13329	≤18%	15%
Effect of Furniture Leg	EN 424	No damage with type 0 indentor	No damage with type 0 indentor
Effect of Castor Chair	EN 425	No damage or visible change in appearance	No damage or visible change in appearance at 25,000 rev
Static Indention	EN 433	No visible change	No visible change
Resistance to Stain	EN 438.2.18	Group 1 & 2: 5	5
		Group 3: 4	4
Resistance to Cigarette Burn	EN 438.2.15	≥Rating 4	5
Formaldehyde Release	EN 717	E1:<0.10ppm	0.08
Determination of Surface Soundness	EN13329	≥1.0N/mm2	1.3
Dimensional Variations After change in Humidity	EN13329	≤0.9mm	0.4
Squareness of Element	EN13329	q max ≤ 0.2mm	<0.2
Height Difference between Elements (Hmax)	EN13329	H average ≤0.10mm	≤0.10
		h max – hmin ≤0.15mm	≤0.15



PRODUCT DETAILS

Pieces per box - 8 planks

Plank Sizes - 1214x192x8mm / 1286*x192x8mm

• Area coverage per box - 1.87m² / 1.97*m²

• Surface finish - Embossed

Core material - High Density Fiber (HDF)

• Edges - Bevel/Square

Installation system - Floating installation system with Uniclic

Application areas - Residential/Light commercial.

Note: for technical response the colours printed here may differ from actual floor colours, we recommend visiting a dealer to view a sample prior to purchase.





Inspiring Great Spaces™

151A, Sowdambigai Nagar, Sivanandhapuram, Coimbatore, Tamil Nadu 641035

Phone: 0422 2666768 | Mobile: +91 98432 07879 | Email: sales@laybrown.com | Website: www.laybrown.com

